

Box-F

Centrifugal fans for rectangular ducts

Use

- Supply and extract ventilation systems installed in various premises.
- Compatible with 400x200 up to 1000x500 mm rectangular air ducts.




Air flow:
up to 9540 m³/h
2650 l/s



Power:
from 282 W



Noise level:
from 50 dBA

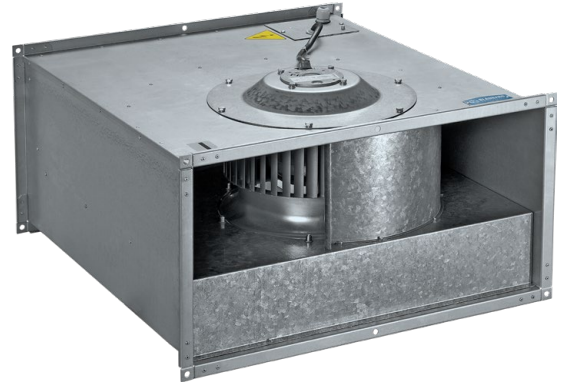

Design

- Atmospheric resistant galvanized steel casing and impeller.
- The fan is rated for continuous operation.
- Fitted with standard 20 mm connecting flanges for connection to rectangular air ducts.
- Access cover on the casing for inspection and maintenance operations.
- The fans with standard size from 40x20 up to 60x35 are equipped with a terminal block integrated into the casing with leaded outside sealed electrical lead-in for connection to power mains.
- The fans with standard size from 70x40 up to 100x50 are equipped with an external terminal block for connection to power mains.

Motor

- Four-, six- or eight-pole asynchronous motor with external rotor and centrifugal impeller with forward curved blades.
- Due to its impeller design the fan has excellent air dynamic characteristics (high performance and pressure drop).
- Single-phase (E) or three-phase (D) motor modifications.
- Equipped with ball bearings for longer service life.
- Dynamically balanced impeller.
- Overheating protection by built-in thermal switches with leaded outside terminals for connection to external protecting controls.
- The thermal switch terminal leads are designed for connection to respective circuit of the overload relay or respective terminals of the auto-transformer or thyristor speed controller.

Speed control

- Smooth speed control with an external thyristor controller or step speed control with an external auto transformer (both available upon separate order).

Mounting

- The fan is designed for mounting inside rectangular air ducts and can be installed in any position.
- The fan flanges are connected to the air ducts through the bolts inserted into the flange holes.
- Mounting to a round air duct on exhaust flange through a round pipe reducer. Available upon order.
- If flexible vibration-absorbing connectors are used to connect the fan to the air ducts provide their fixation to mounting structures with supports or brackets.
- While mounting provide enough space for accessing the cover for service operations.

INLINE FANS FOR RECTANGULAR DUCTS

Designation key


Series	Flange size (width x height) [cm]	Motor Number of poles	Phase
Box-F	40x20; 50x25; 50x30; 60x30; 60x35; 70x40; 80x50; 90x50; 100x50	4; 6; 8	E: single-phase D: three-phase

Accessories

Silencer	Filter box	Electric heater	Water heater	Air dampers	Flexible antivibration connector
 SD	 KFBK / KFBT	 EKH	 WKH	 SL / VG	 EVA

Overall dimensions [mm]

Type	B	B1	B2	H	H1	H2	H3	L	Weight [kg]
Box-F 40x20 4E	400	420	440	200	220	240	255	500	17.5
Box-F 40x20 4D	400	420	440	200	220	240	255	500	17.5
Box-F 50x25 4E	500	520	540	250	270	290	335	640	24.0
Box-F 50x25 6E	500	520	540	250	270	290	335	640	24.0
Box-F 50x25 4D	500	520	540	250	270	290	335	640	24.0
Box-F 50x25 6D	500	520	540	250	270	290	335	640	24.0
Box-F 50x30 4E	500	520	540	300	320	340	365	680	33.0
Box-F 50x30 6E	500	520	540	300	320	340	365	680	33.0
Box-F 50x30 4D	500	520	540	300	320	340	365	680	33.0
Box-F 50x30 6D	500	520	540	300	320	340	365	680	33.0
Box-F 60x30 4E	600	620	640	300	320	340	375	680	35.0
Box-F 60x30 6E	600	620	640	300	320	340	375	680	35.0
Box-F 60x30 4D	600	620	640	300	320	340	375	680	35.0
Box-F 60x30 6D	600	620	640	300	320	340	375	680	35.0
Box-F 60x35 4E	600	620	640	350	370	390	425	735	49.5
Box-F 60x35 6E	600	620	640	350	370	390	425	735	49.5
Box-F 60x35 4D	600	620	640	350	370	390	425	735	49.5
Box-F 60x35 6D	600	620	640	350	370	390	425	735	49.5
Box-F 70x40 4D	700	720	740	400	420	440	480	780	60.0
Box-F 70x40 6D	700	720	740	400	420	440	480	780	56.0
Box-F 80x50 4D	800	820	840	500	520	540	580	820	74.0
Box-F 80x50 6D	800	820	840	500	520	540	580	820	70.0
Box-F 80x50 8D	800	820	840	500	520	540	580	820	70.0
Box-F 90x50 6D	900	920	940	500	520	540	580	954	90.0
Box-F 90x50 8D	900	920	940	500	520	540	580	954	90.0
Box-F 100x50 6D	1000	1020	1040	500	520	540	580	954	95.0
Box-F 100x50 8D	1000	1020	1040	500	520	540	580	954	95.0

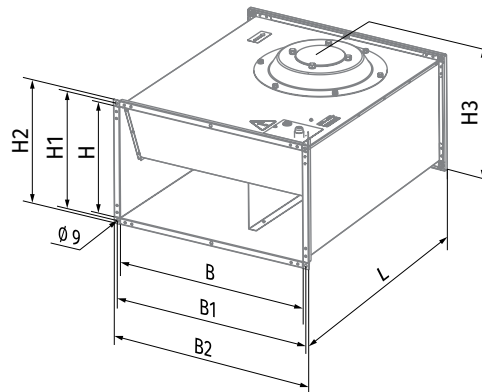

Technical data



Parameters	Box-F 40x20 4E	Box-F 40x20 4D	Box-F 50x25 4E	Box-F 50x25 6E	Box-F 50x25 4D	Box-F 50x25 6D	Box-F 50x30 4E
Voltage [V]	1 ~ 230	3 ~ 400	1 ~ 230	1 ~ 230	3 ~ 400	3 ~ 400	1 ~ 230
Frequency [Hz]	50	50	50	50	50	50	50
Power [W]	295	282	535	244	570	274	710
Current [A]	1.32	0.60	2.49	1.22	0.94	0.67	3.10
Maximum air flow [m ³ /h (l/s)]	1440 (400)	1470 (408)	1750 (486)	1460 (406)	1850 (514)	1490 (414)	2350 (653)
RPM [min ⁻¹]	1350	1300	1250	910	1270	930	1230
Sound pressure at 3 m [dBA]	50	49	53	45	54	45	57
Transported air temperature [°C]	-25...+40	-25...+45	-20...+40	-20...+50	-20...+40	-20...+60	-25...+70
SEC class	-	-	-	-	-	-	-
IP rating	IPX4	IPX4	IPX4	IPX4	IPX4	IPX4	IPX4
Motor IP rating	IP44	IP44	IP44	IP44	IP44	IP44	IP44

BOX-F 40x20 4E

Sound power level, A-weighted	Total	Octave frequency bands [Hz]								LpA 3 m	LpA 1 m
		63	125	250	500	1000	2000	4000	8000		
LWA to inlet [dBA]	82	68	80	74	70	66	63	63	53	61	71
LWA to outlet [dBA]	83	63	74	79	73	77	74	68	65	63	73
LWA to environment [dBA]	71	41	56	69	63	59	52	48	44	50	60


BOX-F 40x20 4D

Sound power level, A-weighted	Total	Octave frequency bands [Hz]								LpA 3 m	LpA 1 m
		63	125	250	500	1000	2000	4000	8000		
LWA to inlet [dBA]	81	64	79	74	65	66	65	60	55	60	70
LWA to outlet [dBA]	80	62	74	75	70	72	68	70	63	60	70
LWA to environment [dBA]	70	41	53	68	63	61	53	48	40	49	59

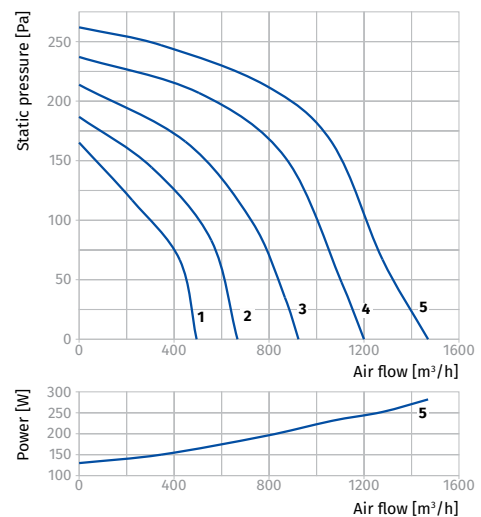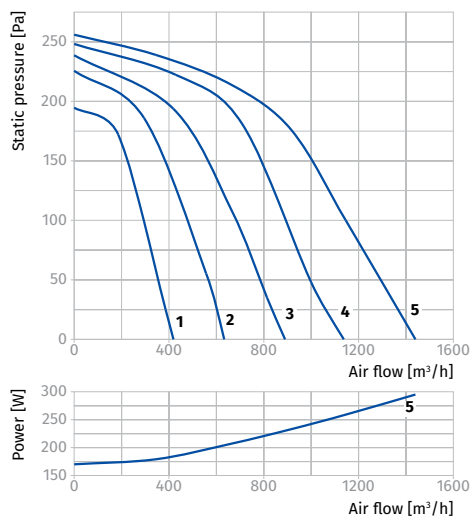


BOX-F 50x25 4E

Sound power level, A-weighted	Total	Octave frequency bands [Hz]								LpA 3 m	LpA 1 m
		63	125	250	500	1000	2000	4000	8000		
LWA to inlet [dBA]	84	69	80	74	68	74	76	74	71	63	73
LWA to outlet [dBA]	86	66	72	71	76	83	79	78	72	66	76
LWA to environment [dBA]	74	50	60	66	65	69	64	63	65	53	63

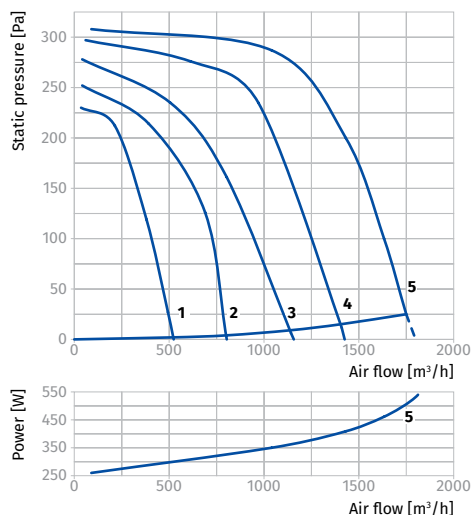


BOX-F 50x25 6E

Sound power level, A-weighted	Total	Octave frequency bands [Hz]								LpA 3 m	LpA 1 m
		63	125	250	500	1000	2000	4000	8000		
LWA to inlet [dBA]	78	66	74	70	67	70	68	66	64	58	68
LWA to outlet [dBA]	80	60	69	69	71	73	73	72	67	59	69
LWA to environment [dBA]	66	44	52	57	57	60	56	54	57	45	55

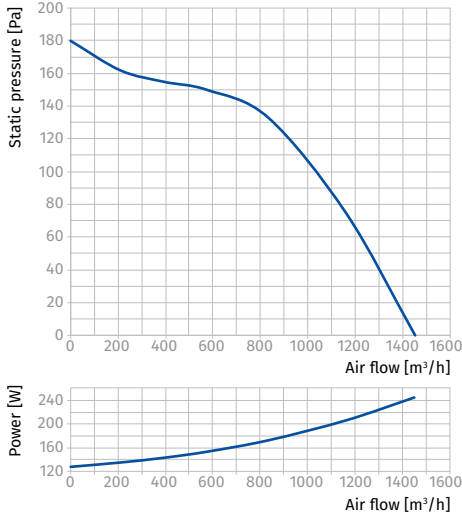


BOX-F 50x25 4D

Sound power level, A-weighted	Total	Octave frequency bands [Hz]								LpA 3 m	LpA 1 m
		63	125	250	500	1000	2000	4000	8000		
LWA to inlet [dBA]	85	73	81	77	74	77	75	73	70	65	75
LWA to outlet [dBA]	88	68	77	77	80	82	82	81	75	68	78
LWA to environment [dBA]	75	51	60	66	66	70	65	63	66	54	64

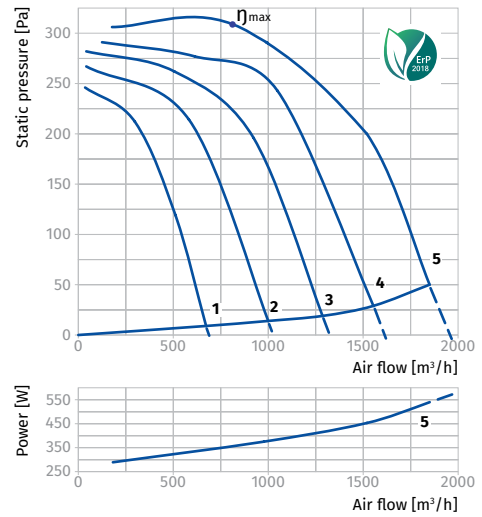


BOX-F 50x25 6D

Sound power level, A-weighted	Total	Octave frequency bands [Hz]								LpA 3 m	LpA 1 m
		63	125	250	500	1000	2000	4000	8000		
LWA to inlet [dBA]	77	65	72	69	66	69	67	65	62	56	66
LWA to outlet [dBA]	80	61	69	69	71	73	73	72	67	59	69
LWA to environment [dBA]	66	44	52	57	57	61	57	55	57	45	55

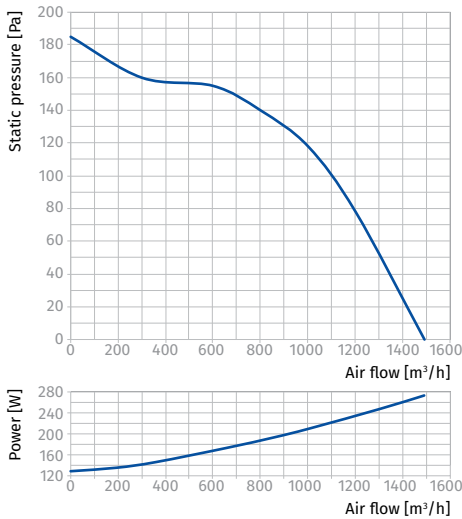

BOX-F 50x30 4E

Sound power level, A-weighted	Total	Octave frequency bands [Hz]								LpA 3 m	LpA 1 m
		63	125	250	500	1000	2000	4000	8000		
LWA to inlet [dBA]	86	75	81	76	74	77	78	76	70	65	75
LWA to outlet [dBA]	88	69	77	74	81	82	81	80	72	67	77
LWA to environment [dBA]	78	57	66	73	67	72	69	61	62	57	67

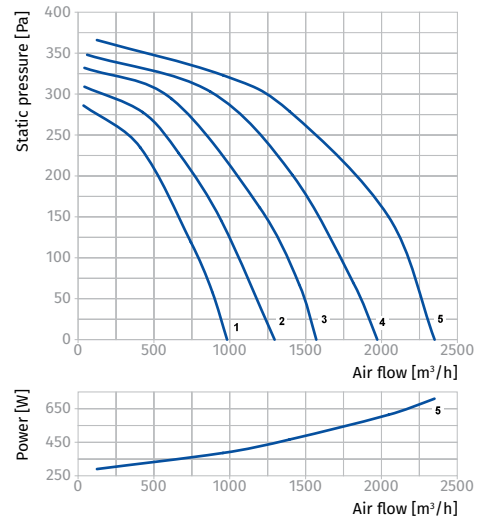

INLINE FANS FOR RECTANGULAR DUCTS



Parameters	Box-F 50x30 6E	Box-F 50x30 4D	Box-F 50x30 6D	Box-F 60x30 4E	Box-F 60x30 6E	Box-F 60x30 4D	Box-F 60x30 6D
Voltage [V]	1 ~ 230	3 ~ 400	3 ~ 400	1 ~ 230	1 ~ 230	3 ~ 400	3 ~ 400
Frequency [Hz]	50	50	50	50	50	50	50
Power [W]	283	855	303	1240	419	1560	397
Current [A]	1.59	1.70	0.8	6.45	2.05	2.73	0.78
Maximum air flow [m ³ /h (l/s)]	1550 (431)	2350 (653)	1620 (450)	2950 (820)	2260 (628)	3740 (1039)	2320 (644)
RPM [min ⁻¹]	890	1300	910	1210	870	1310	920
Sound pressure at 3 m [dBA]	47	56	51	59	50	57	49
Transported air temperature [°C]	-20...+70	-20...+50	-20...+60	-25...+50	-20...+70	-25...+65	-20...+70
SEC class	-	-	-	-	-	-	-
IP rating	IPX4	IPX4	IPX4	IPX4	IPX4	IPX4	IPX4
Motor IP rating	IP44	IP44	IP44	IP44	IP44	IP44	IP44

BOX-F 50x30 6E


Sound power level, A-weighted	Total	Octave frequency bands [Hz]								LpA 3 m	LpA 1 m
		63	125	250	500	1000	2000	4000	8000		
LWA to inlet [dBA]	75	65	70	65	64	66	67	65	60	54	64
LWA to outlet [dBA]	77	59	66	64	70	71	70	69	62	56	66
LWA to environment [dBA]	68	49	57	63	58	62	59	52	53	47	57

BOX-F 50x30 4D

Sound power level, A-weighted	Total	Octave frequency bands [Hz]								LpA 3 m	LpA 1 m
		63	125	250	500	1000	2000	4000	8000		
LWA to inlet [dBA]	85	76	79	71	72	78	78	76	72	64	74
LWA to outlet [dBA]	86	66	73	75	77	81	80	79	73	66	76
LWA to environment [dBA]	76	56	67	70	68	73	65	58	57	56	66

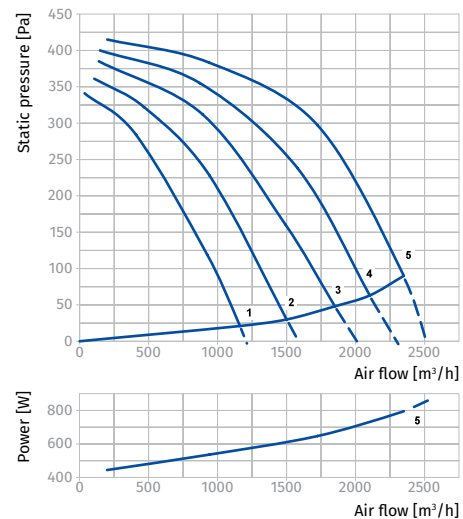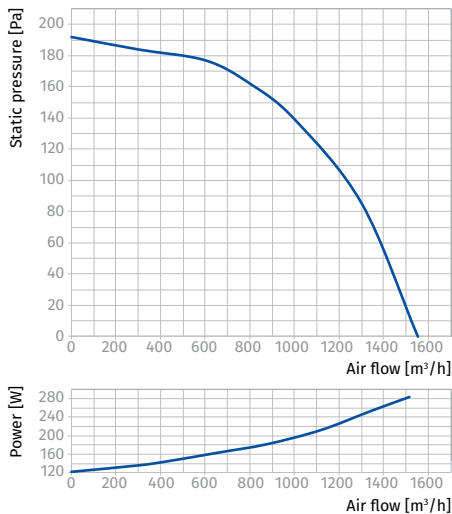

BOX-F 50x30 6D

Sound power level, A-weighted	Total	Octave frequency bands [Hz]								LpA 3 m	LpA 1 m
		63	125	250	500	1000	2000	4000	8000		
LWA to inlet [dBA]	80	71	73	66	67	73	73	71	67	59	69
LWA to outlet [dBA]	81	61	68	70	72	75	74	73	68	60	70
LWA to environment [dBA]	72	52	62	65	63	68	60	54	53	51	61

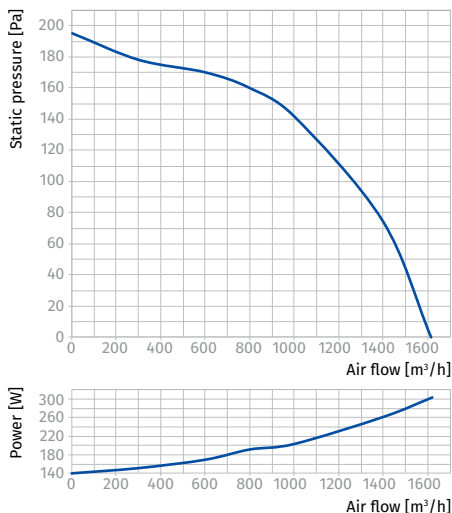


BOX-F 60X30 4E

Sound power level, A-weighted	Total	Octave frequency bands [Hz]								LpA 3 m	LpA 1 m
		63	125	250	500	1000	2000	4000	8000		
LWA to inlet [dBA]	87	72	84	75	72	77	76	77	73	66	76
LWA to outlet [dBA]	89	67	73	77	80	85	82	79	72	68	78
LWA to environment [dBA]	80	48	75	76	70	71	64	61	54	59	69

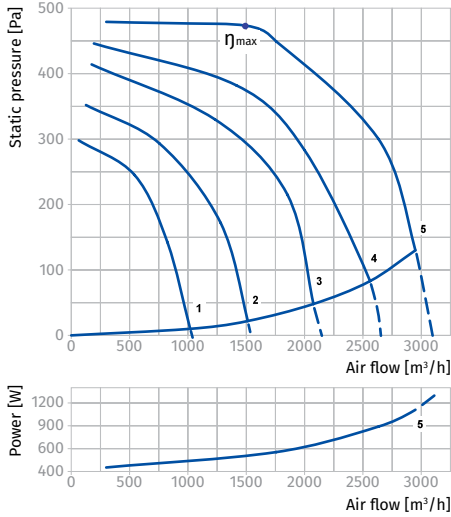


BOX-F 60X30 6E

Sound power level, A-weighted	Total	Octave frequency bands [Hz]								LpA 3 m	LpA 1 m
		63	125	250	500	1000	2000	4000	8000		
LWA to inlet [dBA]	81	73	76	72	66	73	72	65	61	60	70
LWA to outlet [dBA]	83	62	74	68	78	77	74	71	66	62	72
LWA to environment [dBA]	71	60	58	69	55	57	60	46	42	50	60

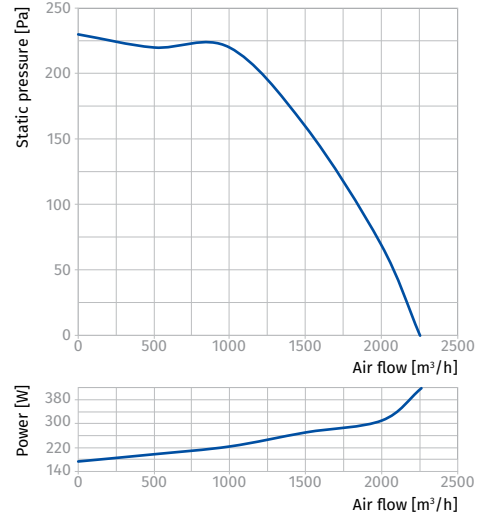


BOX-F 60X30 4D

Sound power level, A-weighted	Total	Octave frequency bands [Hz]								LpA 3 m	LpA 1 m
		63	125	250	500	1000	2000	4000	8000		
LWA to inlet [dBA]	84	69	81	70	71	74	76	71	72	63	73
LWA to outlet [dBA]	86	64	78	73	78	81	77	78	69	66	76
LWA to environment [dBA]	77	49	71	70	72	70	62	55	58	57	67

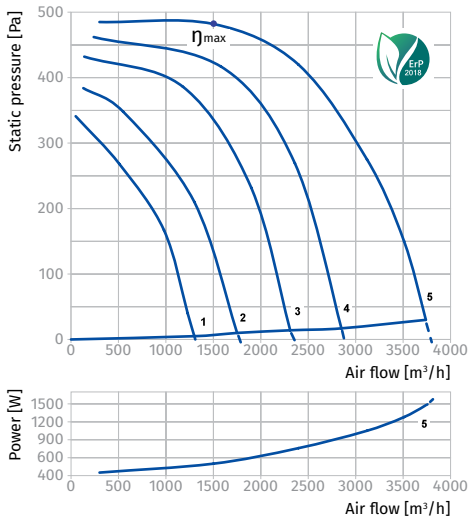

BOX-F 60X30 6D

Sound power level, A-weighted	Total	Octave frequency bands [Hz]								LpA 3 m	LpA 1 m
		63	125	250	500	1000	2000	4000	8000		
LWA to inlet [dBA]	79	65	73	72	69	70	72	68	60	58	68
LWA to outlet [dBA]	83	64	71	64	79	76	74	73	65	62	72
LWA to environment [dBA]	70	40	57	68	61	60	59	52	42	49	59

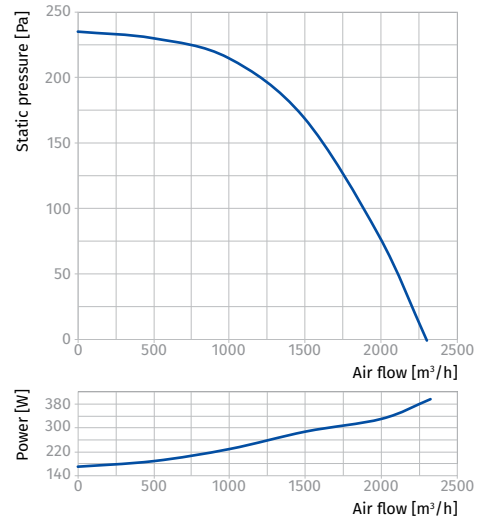

INLINE FANS FOR RECTANGULAR DUCTS



Parameters	Box-F 60x35 4E	Box-F 60x35 6E	Box-F 60x35 4D	Box-F 60x35 6D	Box-F 70x40 4D	Box-F 70x40 6D
Voltage [V]	1 ~ 230	1 ~ 230	3 ~ 400	3 ~ 400	3 ~ 400	3 ~ 400
Frequency [Hz]	50	50	50	50	50	50
Power [W]	2840	720	2460	743	3630	1150
Current [A]	13.90	3.6	3.93	1.47	6.00	2.3
Maximum air flow [m³/h (l/s)]	4260 (1183)	2755 (765)	5020 (1395)	3310 (920)	6450 (1792)	4050 (1125)
RPM [min⁻¹]	1260	820	1300	940	1320	890
Sound pressure at 3 m [dBA]	59	51	60	55	65	58
Transported air temperature [°C]	-20...+40	-20...+60	-20...+40	-20...+70	-25...+40	-20...+70
SEC class	-	-	-	-	-	-
IP rating	IPX4	IPX4	IPX4	IPX4	IPX4	IPX4
Motor IP rating	IP44	IP44	IP44	IP44	IP44	IP44

BOX-F 60X35 4E

Sound power level, A-weighted	Total	Octave frequency bands [Hz]								LpA 3 m	LpA 1 m
		63	125	250	500	1000	2000	4000	8000		
LWA to inlet [dBA]	85	76	79	70	71	80	77	75	68	65	75
LWA to outlet [dBA]	89	74	78	79	80	83	81	82	73	69	79
LWA to environment [dBA]	80	65	72	76	70	74	66	61	58	59	69


BOX-F 60X35 6E

Sound power level, A-weighted	Total	Octave frequency bands [Hz]								LpA 3 m	LpA 1 m
		63	125	250	500	1000	2000	4000	8000		
LWA to inlet [dBA]	80	68	74	70	71	74	71	70	63	60	70
LWA to outlet [dBA]	84	62	71	72	80	77	72	77	64	63	73
LWA to environment [dBA]	72	61	62	68	61	64	62	52	44	51	61

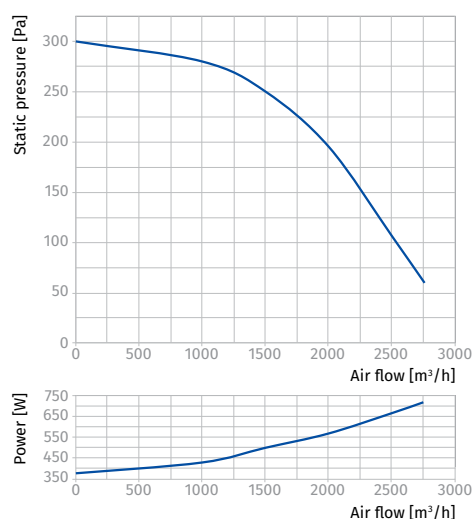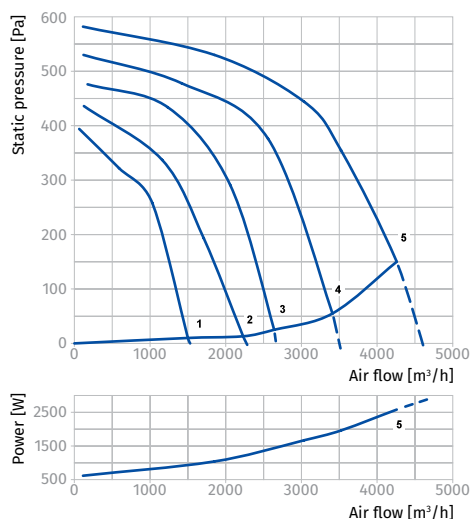


BOX-F 60X35 4D

Sound power level, A-weighted	Total	Octave frequency bands [Hz]								LpA 3 m	LpA 1 m
		63	125	250	500	1000	2000	4000	8000		
LWA to inlet [dBA]	86	73	80	76	77	80	77	76	68	65	75
LWA to outlet [dBA]	90	67	77	78	86	83	78	83	69	70	80
LWA to environment [dBA]	80	69	70	77	69	72	70	59	50	60	70

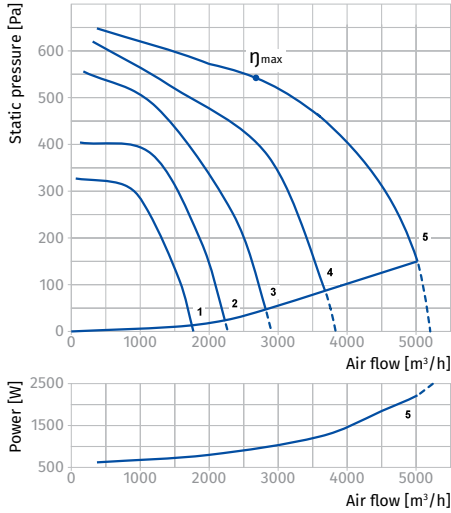


BOX-F 60X35 6D

Sound power level, A-weighted	Total	Octave frequency bands [Hz]								LpA 3 m	LpA 1 m
		63	125	250	500	1000	2000	4000	8000		
LWA to inlet [dBA]	82	69	76	72	73	76	73	72	65	62	72
LWA to outlet [dBA]	86	64	73	74	82	79	74	79	66	65	75
LWA to environment [dBA]	76	65	66	72	65	68	66	55	47	55	65

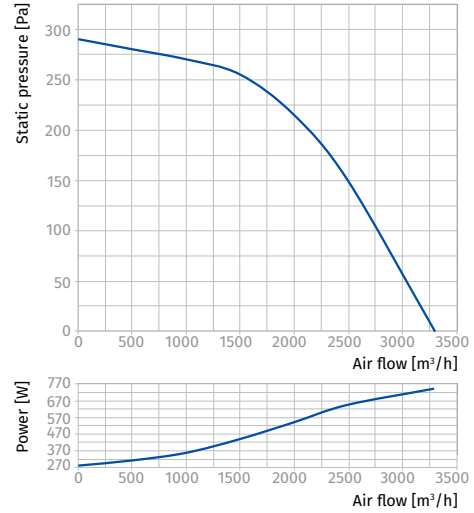


BOX-F 70X40 4D

Sound power level, A-weighted	Total	Octave frequency bands [Hz]								LpA 3 m	LpA 1 m
		63	125	250	500	1000	2000	4000	8000		
LWA to inlet [dBA]	90	86	83	76	77	81	79	77	73	69	79
LWA to outlet [dBA]	92	78	82	79	82	87	85	81	75	71	81
LWA to environment [dBA]	86	64	74	80	78	81	73	72	68	65	75

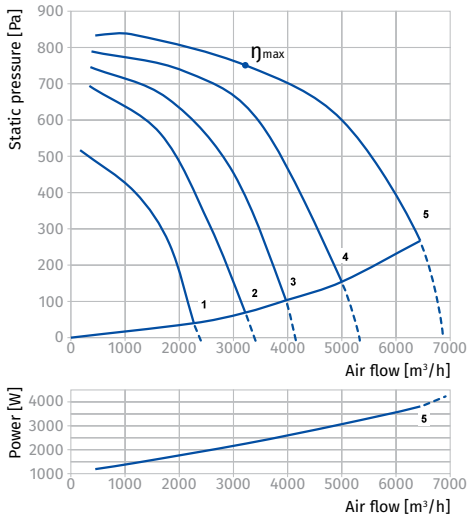

BOX-F 70X40 6D

Sound power level, A-weighted	Total	Octave frequency bands [Hz]								LpA 3 m	LpA 1 m
		63	125	250	500	1000	2000	4000	8000		
LWA to inlet [dBA]	83	79	76	70	71	75	73	71	67	63	73
LWA to outlet [dBA]	87	73	77	74	77	82	80	76	71	66	76
LWA to environment [dBA]	78	58	67	73	71	74	66	66	62	58	68

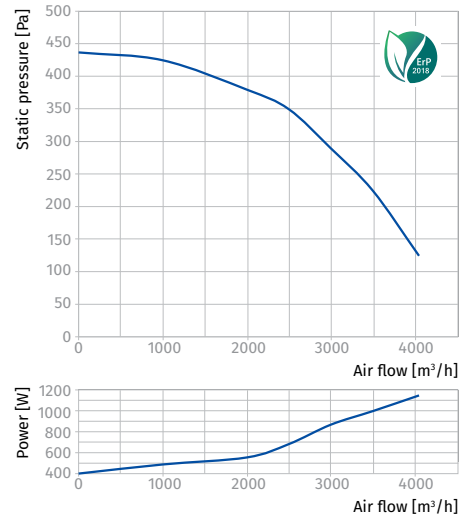

INLINE FANS FOR RECTANGULAR DUCTS



Parameters	Box-F 80x50 4D	Box-F 80x50 6D	Box-F 80x50 8D	Box-F 90x50 6D	Box-F 90x50 8D	Box-F 100x50 6D	Box-F 100x50 8D
Voltage [V]	3 ~ 400	3 ~ 400	3 ~ 400	3 ~ 400	3 ~ 400	3 ~ 400	3 ~ 400
Frequency [Hz]	50	50	50	50	50	50	50
Power [W]	5850	2790	1377	3870	2000	3870	2000
Current [A]	9.35	5.18	3.40	7.0	4.1	7.0	4.1
Maximum air flow [m ³ /h (l/s)]	8120 (2256)	7610 (2114)	5620 (1561)	9540 (2650)	7175 (1993)	9540 (2650)	7175 (1993)
RPM [min ⁻¹]	1140	830	710	930	680	930	680
Sound pressure at 3 m [dBA]	67	59	55	61	59	61	59
Transported air temperature [°C]	-25...+40	-20...+50	-20...+40	-20...+55	-20...+40	-20...+55	-20...+40
SEC class	-	-	-	-	-	-	-
IP rating	IPX4	IPX4	IPX4	IPX4	IPX4	IPX4	IPX4
Motor IP rating	IP44	IP44	IP44	IP44	IP44	IP44	IP44

BOX-F 80X50 4D

Sound power level, A-weighted	Total	Octave frequency bands [Hz]								LpA 3 m	LpA 1 m
		63	125	250	500	1000	2000	4000	8000		
LWA to inlet [dBA]	91	80	83	84	78	84	83	78	75	70	80
LWA to outlet [dBA]	96	77	82	81	88	92	91	86	83	76	86
LWA to environment [dBA]	87	72	80	79	77	83	78	72	71	67	77


BOX-F 80X50 6D

Sound power level, A-weighted	Total	Octave frequency bands [Hz]								LpA 3 m	LpA 1 m
		63	125	250	500	1000	2000	4000	8000		
LWA to inlet [dBA]	86	75	78	80	74	80	78	74	71	66	76
LWA to outlet [dBA]	90	71	76	75	81	85	84	79	77	69	79
LWA to environment [dBA]	80	65	73	72	70	75	71	65	64	59	69

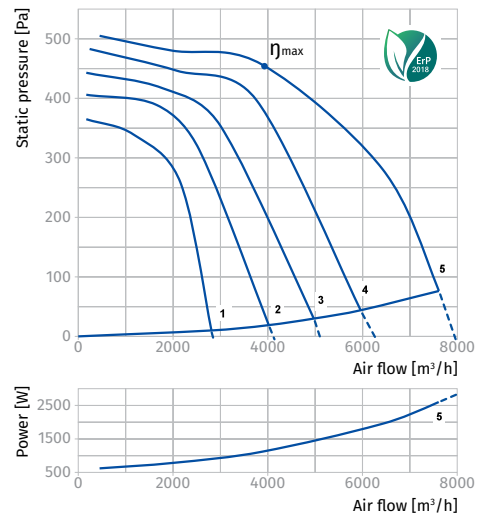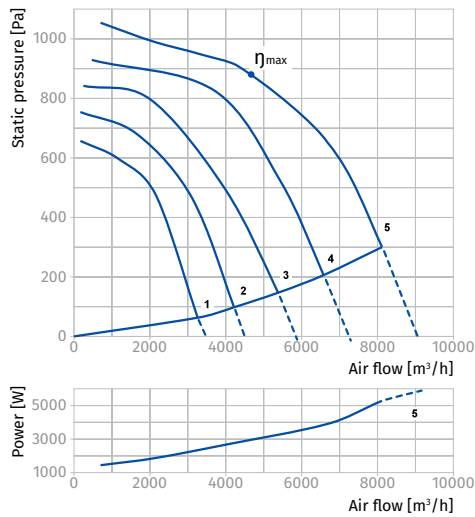


BOX-F 80X50 8D

Sound power level, A-weighted	Total	Octave frequency bands [Hz]								LpA 3 m	LpA 1 m
		63	125	250	500	1000	2000	4000	8000		
LWA to inlet [dBA]	80	69	71	70	68	76	73	68	59	60	70
LWA to outlet [dBA]	85	65	67	71	82	78	76	72	64	64	74
LWA to environment [dBA]	75	58	57	68	60	63	64	65	72	55	65

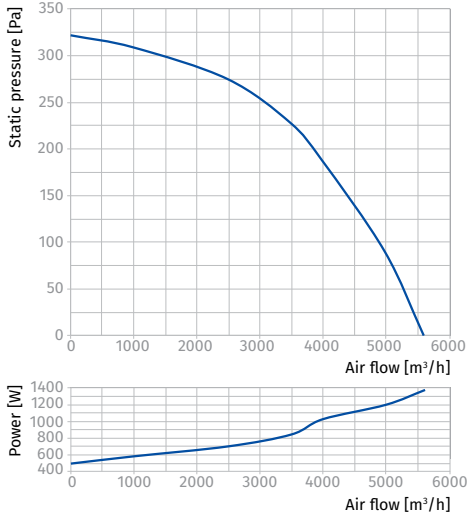


BOX-F 90X50 6D

Sound power level, A-weighted	Total	Octave frequency bands [Hz]								LpA 3 m	LpA 1 m
		63	125	250	500	1000	2000	4000	8000		
LWA to inlet [dBA]	91	80	82	78	84	85	82	78	73	70	80
LWA to outlet [dBA]	99	78	80	86	97	90	89	88	78	79	89
LWA to environment [dBA]	81	64	68	79	74	71	70	66	58	61	71

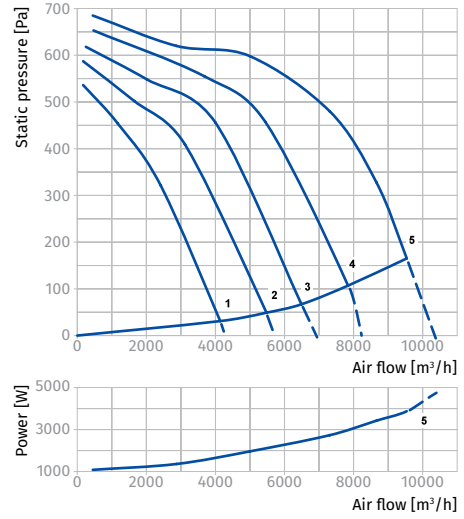


BOX-F 90X50 8D / BOX-F 100X50 8D

Sound power level, A-weighted	Total	Octave frequency bands [Hz]								LpA 3 m	LpA 1 m
		63	125	250	500	1000	2000	4000	8000		
LWA to inlet [dBA]	87	77	79	75	81	82	79	75	70	67	77
LWA to outlet [dBA]	93	73	75	81	91	85	84	83	73	73	83
LWA to environment [dBA]	79	62	66	77	72	69	68	64	56	59	69

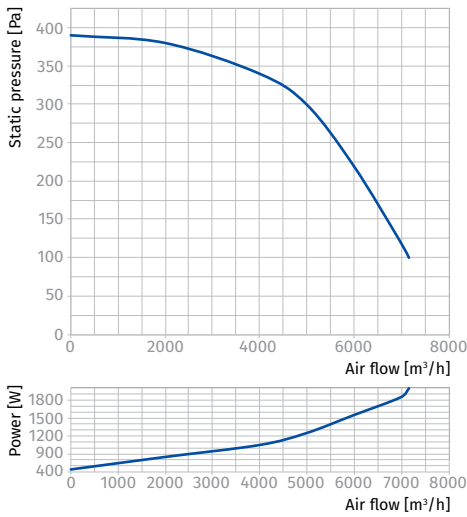

BOX-F 100X50 6D

Sound power level, A-weighted	Total	Octave frequency bands [Hz]								LpA 3 m	LpA 1 m
		63	125	250	500	1000	2000	4000	8000		
LWA to inlet [dBA]	91	80	82	78	84	85	82	78	73	70	80
LWA to outlet [dBA]	99	78	80	86	97	90	89	88	78	79	89
LWA to environment [dBA]	81	64	68	79	74	71	70	66	58	61	71

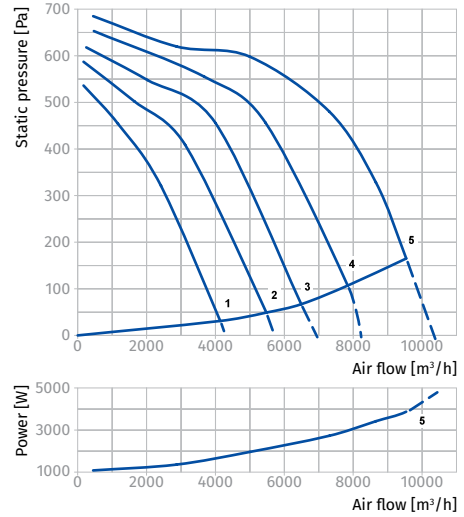

INLINE FANS FOR RECTANGULAR DUCTS