

BF 100HTX

Centrifugal bathroom fan, <125W

Item number: 246881

Ideal for air-extraction in small and medium size premises. Powerful extract fans, designed to overcome the resistances of long ducting systems. Units can be wall/panel and ceiling mounted: designed for surface or flush (plasterboard) installation through dedicated accessory on request.

Casing made of high quality ABS and polystyrene provides long lasting shockproof and robust construction. The unit is finished in white RAL 9010 and are UV resistant.

Forward curved centrifugal impeller, providing enhanced aerodynamic properties, low noise and increased efficiency.


Two-speed induction motor, totally enclosed type, with integral thermal protection, mounted on sealed for life high quality ball bearings (30.000h), ideal for cool climate. Suitable for continuous and intermittent running.



Technical parameters


Dimensions and weights	
Weight	1.9 kg

Performances

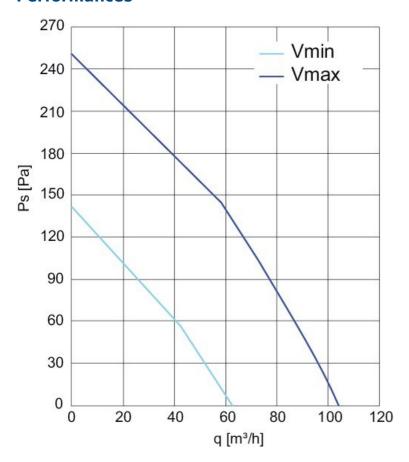

Dimension

BF	Α	В	C	øD	(mm)
80	241,5	96,5	17	73,5	
100	241,5	96,5	17	96	

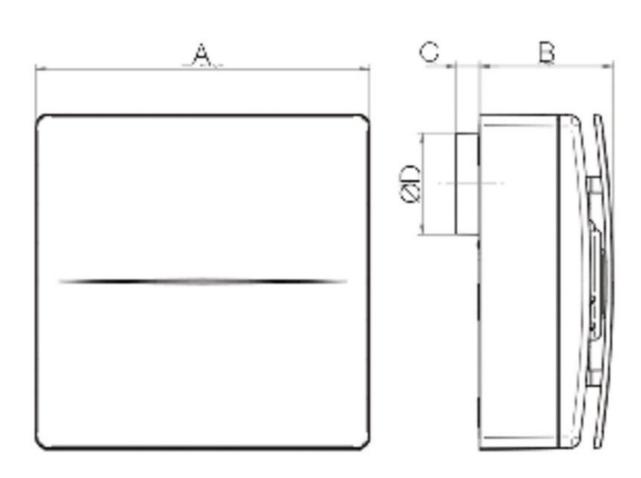

Accessories

• Gasket CGX 80/100 BF-X (231911)

Documents

- Installation manual BF-X
- <u>CE-DECLARATION_OF_CONFORMITY_BF___X.PDF</u>