


The Original

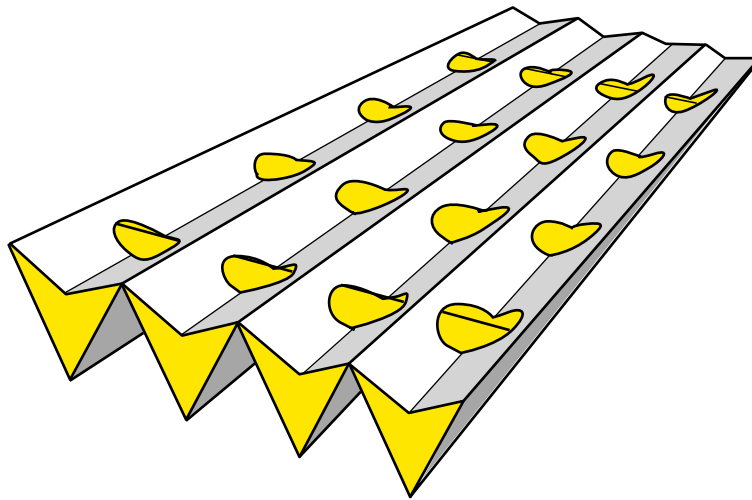

2 layers of heavy "kraft" paper, punched, pleated and glued together, with an extension limiter

Holding capacity up to 18 kg/m² **

Filtration efficiency up to 98,1% **




Flame retardant filter certified to the norm DIN53438 F1/K1

Optimized using conditions :

Recommended air velocity : 0.25 – 1 M/S

Dépression à :
 0.25 M/S ➤ 8 Pa
 0.5 M/S ➤ 20 Pa
 0.75 M/S ➤ 30 Pa
 1 M/S ➤ 40 Pa

Maximum recommended pressure drop : 128 Pa - possible up to 256 Pa

Height - area	75cm - 10m ²	90cm - 8,35m ² *	90cm - 10m ²	100cm - 10m ²
BROWN 	AF711	AF811	AF911	AF111
WHITE 	AF713	AF813	AF913	AF113
FLAME RETARDANT 	AF712	AF812	AF912	AF112
Number of filters per pallet	60	60	60	60

* 8,35m² = 10 sqyd

** depending on paint used