

## Series

**VENTS VKM EC**


Inline centrifugal fans with the air flow up to **1370 m<sup>3</sup>/h** in steel casing

**Application**

Supply and exhaust ventilation and air conditioning systems for various premises requiring cost-effective solution and controllable ventilation. EC motors applied in in VKM fans reduce energy demand by about 35 % and ensure high aerodynamic performance and low noise level. Such

characteristics are of special importance for ventilation of public premises as banks, supermarkets, restaurants, hotels, installation close to residential buildings and for domestic application, e.g. ventilation of private pools. EC motors enable integration of several fans into a unified networks and their centralized control. The steel casing ensures reliable operation of the fan in case of its outside installation. The fans are designed for connection to Ø 100, 125, 150, 160, 200, 250 and 315 mm air ducts.

**Design**

The fan casing is made of polymer coated steel. New technologies for manufacture of the fan components let attain the total casing air tightness.

**Motor**

The impellers with backward curved blades are powered with a high efficient electronically commutated (EC) direct current motor with external rotor. As of today, such motor type is the most advanced solution for energy saving. EC motors are featured by high performance and the best speed controllable range. Premium efficiency reaching up to 90 % is the absolute advantage of electronically commutated motors. The motors are equipped with ball bearings for longer service life of the fan (40 000 hours). For precise features, safe operation and low noise, each turbine is dynamically balanced while assembly. Motor ingress protection rating IP44.

**Speed control**


The fan is controlled with the external control signal 0-10 V (air flow control as a function of temperature, pressure, smoke conditions and other parameters). Should the control value get changed, the EC motor adjusts its speed and the fan boosts as much air flow to the ventilation system as required. Maximum speed of the fan does not depend on the current frequency and it can operate at 50 or 60 Hz mains supply. The fans may be integrated into the unified dispatch system. The respective software enables to control all the fan integrated into the system. The computer displays all the system parameters. Each fan in the system may be individually adjusted.

**Mounting**

The fans may be installed at any angle. The fixing brackets that are included into the delivery set are used to facilitate the fan mounting to the wall. The fan is connected to power mains through the external terminal box.

**Overall dimensions**

Model	Dimensions [mm]									Mass [kg]
	ØD	ØD1	H	B	B1	L	L1	L2	L3	
VKM 100 EC	98	255	340	310	270	203	20	25	30	3.45
VKM 125 EC	123	255	340	310	270	203	20	25	30	3.58
VKM 150 EC	149	305	365	360	320	220	25	25	30	4.17
VKM 160 EC	159	305	365	360	320	220	25	25	30	4.32
VKM 200 EC	198	345	435	395	355	245	25	30	40	5.7
VKMS 200 EC	198	345	435	395	355	255	25	30	40	5.7
VKM 250 EC Q	248	345	435	395	355	250	25	30	40	5.1
VKM 250 EC	248	345	435	395	355	250	25	30	40	5.1
VKM 315 EC	314	405	465	455	415	260	30	30	40	7.3

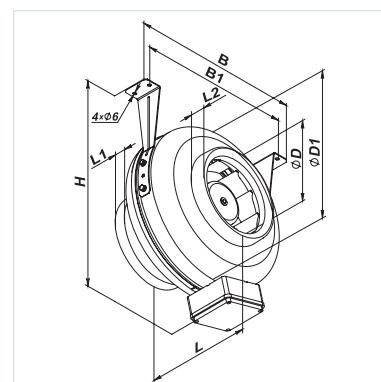**Designation key**



Series	Air duct diameter	Motor	Options
<b>VENTS VKM</b> <b>VENTS VKMS:</b> High-power version	100; 125; 150; 160; 200; 250; 315	<b>EC:</b> electronically commutated synchronous motor	<b>Q:</b> low-power motor. <b>Un:</b> speed controller with electronic thermostat and external temperature sensor fixed on 4 m cable. Equipped with power cord and IEC C14 electric plug. <b>P:</b> built-in smooth speed controller and power cord with IEC C14 electric plug. <b>R:</b> power cord with IEC C14 electric plug. <b>R1:</b> power cable with a mains plug.

**Accessories**





**Technical data**



	<b>VKM 100 EC</b>	<b>VKM 125 EC</b>	<b>VKM 150 EC</b>	<b>VKM 160 EC</b>	<b>VKM 200 EC</b>
Voltage [V/50 (60) Hz]	1~230				
Power [W]	90	83	98	95	83
Current [A]	0.70	0.58	0.73	0.72	0.63
Max. air flow [m³/h]	345	480	620	685	845
RPM [min⁻¹]	3600	3400	2800	2800	2500
Noise level at 3 m [dBA]	44	45	47	47	47
Transported air temperature [°C]	-25...+60				
SEC class	B	B	B	B	B
Protection rating	IPX4				

	<b>VKMS 200 EC</b>	<b>VKM 250 EC Q</b>	<b>VKM 250 EC</b>	<b>VKM 315 EC</b>
Voltage [V/50 (60) Hz]	1~230			
Power [W]	100	100	164	164
Current [A]	0.74	0.74	1.15	1.15
Max. air flow [m³/h]	1010	985	1230	1370
RPM [min⁻¹]	2400	2500	2900	2900
Noise level at 3 m [dBA]	48	44	46	48
Transported air temperature [°C]	-25...+60			
SEC class	B	B	-	-
Protection rating	IPX4			

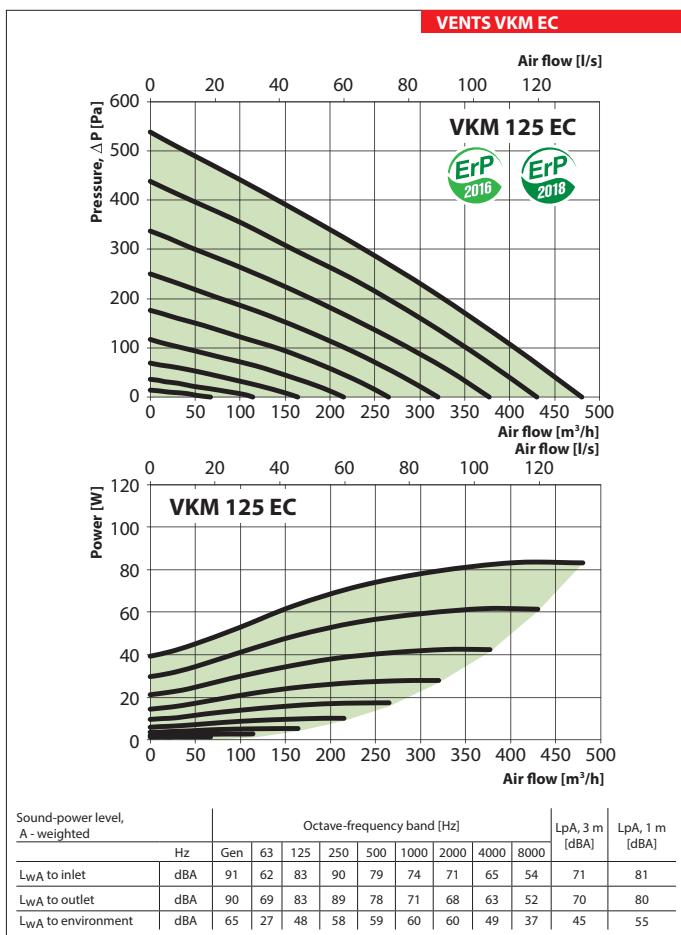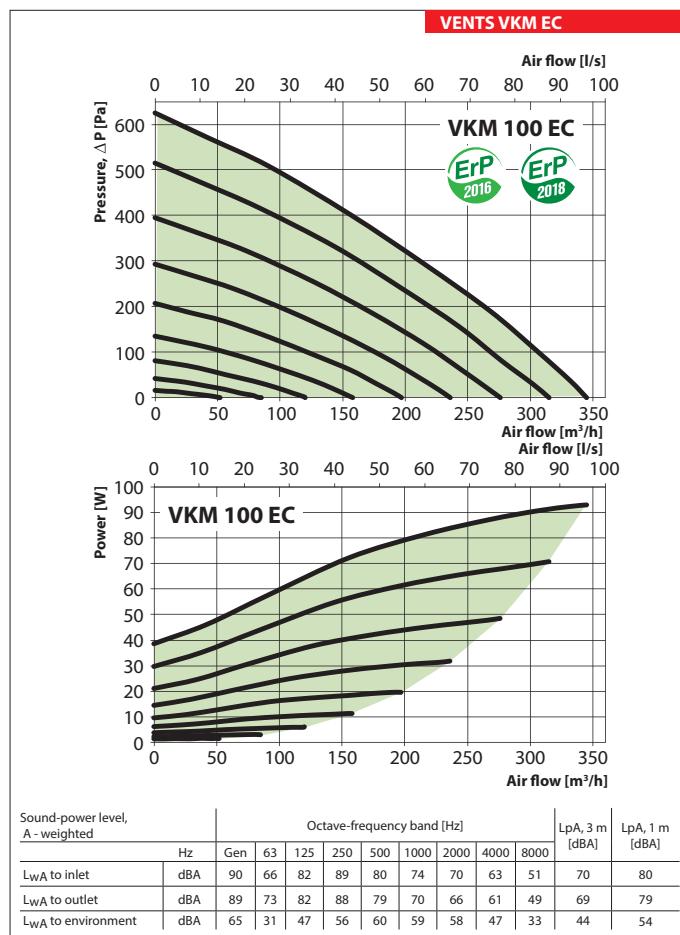


## FANS FOR ROUND DUCTS

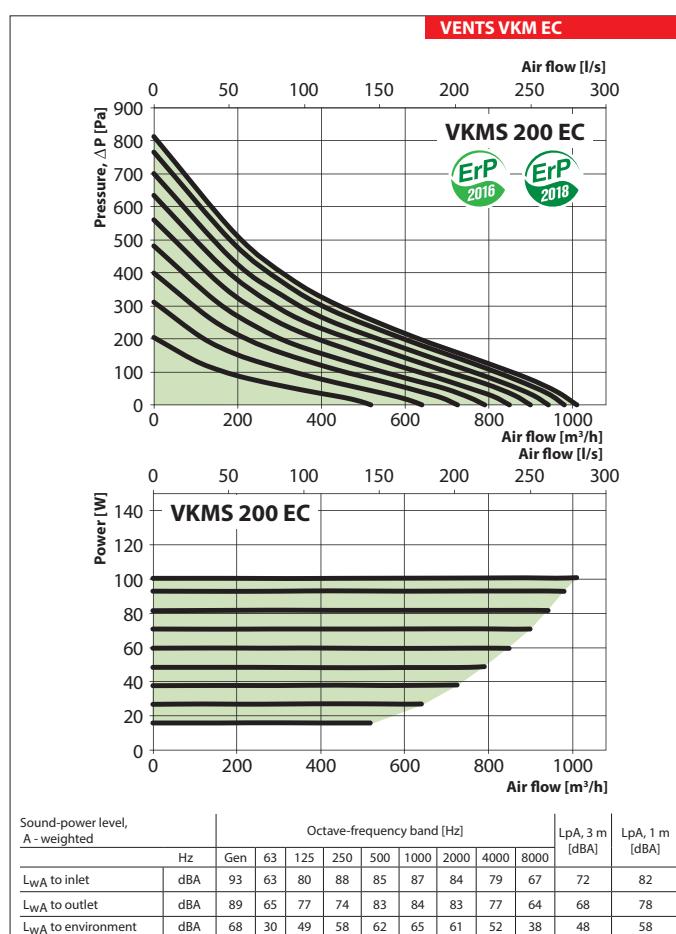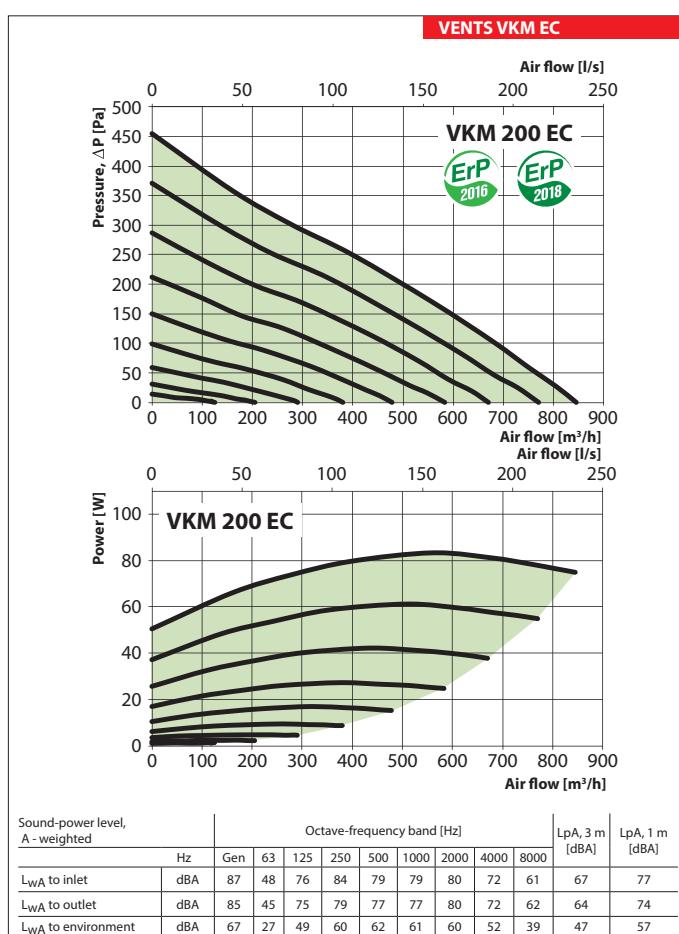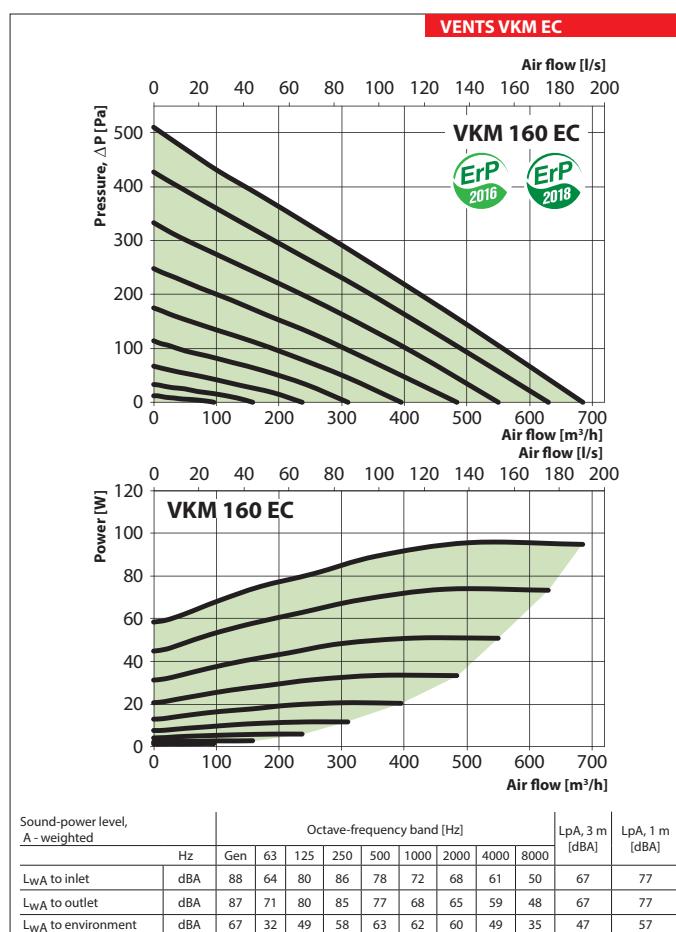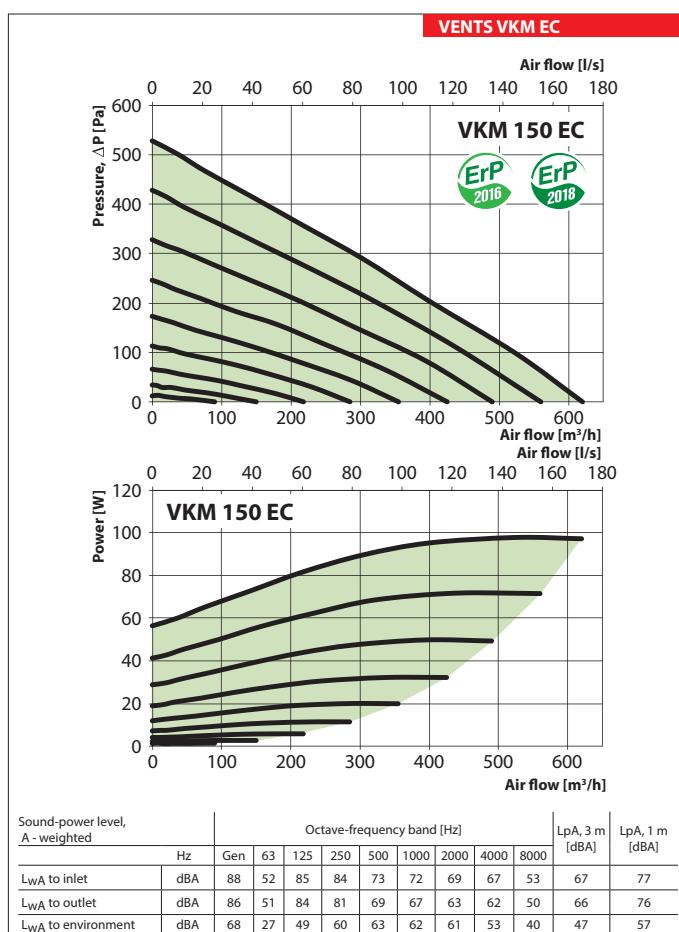

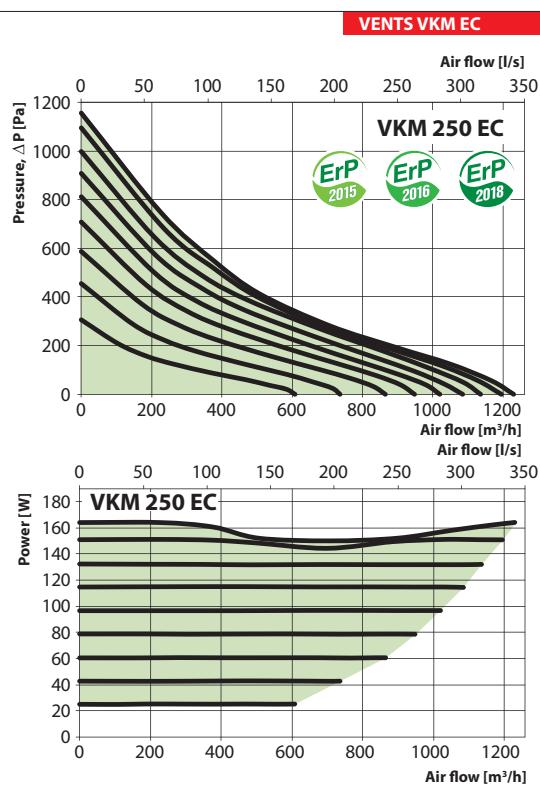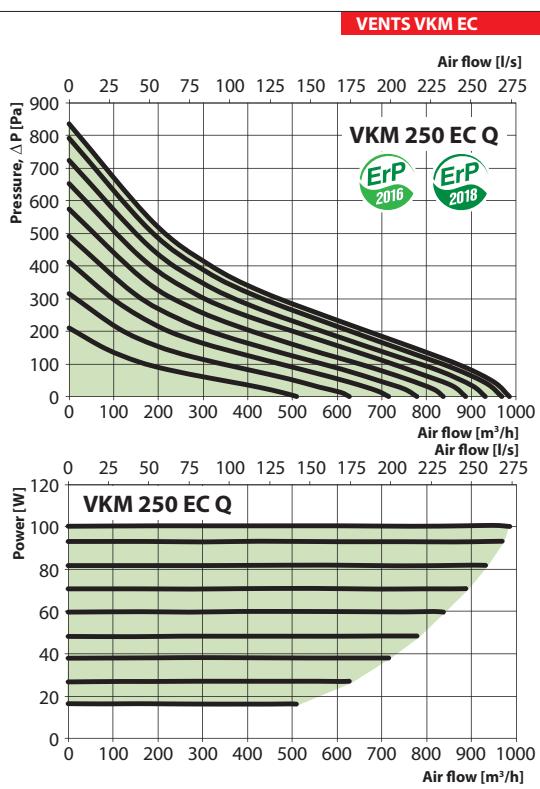

Sound-power level, A - weighted		Octave-frequency band [Hz]								LpA, 3 m [dBA]	LpA, 1 m [dBA]	
Hz	Gen	63	125	250	500	1000	2000	4000	8000			
LwA to inlet	dBA	88	60	76	83	81	83	79	75	63	68	78
LwA to outlet	dBA	87	63	75	72	81	82	81	76	62	67	77
LwA to environment	dBA	65	28	46	55	58	61	57	49	36	44	54

Sound-power level, A - weighted		Octave-frequency band [Hz]								LpA, 3 m [dBA]	LpA, 1 m [dBA]	
Hz	Gen	63	125	250	500	1000	2000	4000	8000			
LwA to inlet	dBA	90	61	77	85	83	84	81	76	65	69	79
LwA to outlet	dBA	89	65	77	74	83	85	83	78	64	69	79
LwA to environment	dBA	67	29	48	57	60	63	59	51	37	46	56

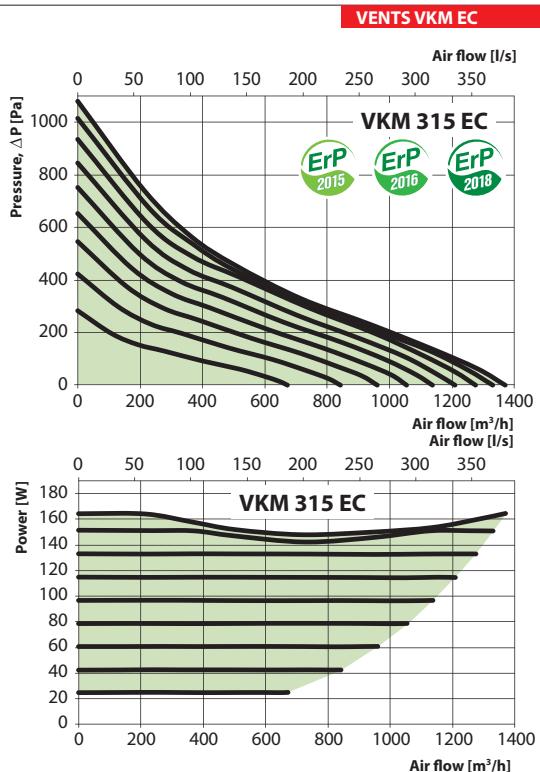

Sound-power level, A - weighted		Octave-frequency band [Hz]								LpA, 3 m [dBA]	LpA, 1 m [dBA]	
Hz	Gen	63	125	250	500	1000	2000	4000	8000			
LwA to inlet	dBA	86	51	73	71	75	81	82	77	68	66	76
LwA to outlet	dBA	87	55	66	76	73	81	84	77	69	67	77
LwA to environment	dBA	69	30	48	56	62	64	64	56	49	48	58